


# Disconnect Terminals

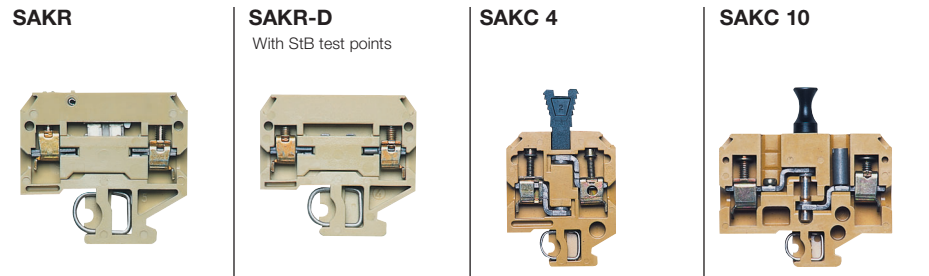

**Lever**                      **Plug**                      **Pull Pin**                      **Pull Pin**

## Terminal Block Selection Data

Available Options	Version	SAKR	SAKR-D	SAKC 4	SAKC 10
With 2 StB test points KrS PA		0412260000	0183360000	0546460000*	
With 2 StB test points KrS Blue PA		0412280000	0183380000		
With 2 StB test points KrS without diode PA				0413160000*	
Beige PA		0412160000	0172160000	0412960000*	0299960000*
Blue PA		0412180000	0172180000		
Without diode PA				0413060000**	0185760000**
With diode PA				0263360000***	0299560000***
Orange PA		1461960000			
KrG		0412120000		0340720000	0357520000
KrS					0324030000
With 1 StB test point KrG					1404520000
With 2 StB test points KrG		0412220000		0340620000	0357620000
With 2 StB test points KrS					0324120000
					1404620000
					0324130000

## Dimensions

Width / Length / Height mm (in.)	for TS 32	for TS 35	SAKR	SAKR-D	SAKC 4	SAKC 10
	↶	↷	6.5/42/40.5 (.26/1.81/1.60)	6.5/42/57 (.26/1.81/2.24)	6.5/40/67 (.26/1.57/2.64)	12/65/70.5 (.47/2.56/2.76)
Insulation stripping length			mm (in.)	8 (.31)	12 (.47)	12 (.47)

## Technical Data

Rated voltage / rated current / wire size	UL	SAKR	SAKR-D	SAKC 4	SAKC 10
		300 V / 10 A / #22...12 AWG	300 V / 10 A / #22...12 AWG	300 V / 25 A / #22...12 AWG	600 V / 25 A / #22...8 AWG
	CSA	300 V / 10 A / #26...12 AWG	300 V / 10 A / #22...12 AWG	300 V / 25 A / #22...10 AWG	600 V / 25 A / #20...10 AWG
	VDE	380 VAC / 10 A / 4 mm <sup>2</sup>	380 VAC / 10 A / 4 mm <sup>2</sup>	380 VAC / 25 A / 4 mm <sup>2</sup>	500 VAC / 27 A / 10 mm <sup>2</sup>
Torque	Nm (lb. in.)	0.6 / 0.5 StB (8.0 / 4.5 StB)	0.6 / 0.5 StB (8.0 / 4.5 StB)	0.6 / 0.5 StB (7.0 / 4.5 StB)	3.0 (26.0)
Clamping screw	M	3	3	3	4

## Selected Accessory Data<sup>‡</sup>

End Plate (thickness mm)	Type	Part No.	Type	Part No.	Type	Part No.	Type	Part No.
Beige PA	AP (1.5)	0211360000	AP (1.5)	0211360000				
Blue PA	AP (1.5)	0211380000						
KrG	AP (1.5)	0211320000			AP (1.5)	0117920000	AP (3.0)	0146720000
KrS							AP (3.0)	0146730000
Partition (thickness mm)								
PA					TW (1.5)	0130160000	TW (1.5)	0242960000
KrG							TW (3.0)	0242920000
KrS							TW (3.0)	0242930000
HP	TW (1.0)	↶ 0297100000	TW (1.0)	↶ 0297100000	TW (1.0)	↶ 0297100000		

## Jumpers

QB	Final number indicates number of poles. See the Accessories Section for more information. When using QB, maximum conductor connection is 2.5 mm <sup>2</sup> .	SAKR	SAKR-D	SAKC 4	SAKC 10	
QB 2		0482700000	0482700000	0482700000	QL 2	0135500000
QB 3		0482800000	0482800000	0482800000	QL 3	0135600000
QB 4		0482900000	0482900000	0482900000	QL 4	0135700000
QB 25 bare*		0134000000	0134000000	0134000000	QL 10	0338500000
	Connection sleeve				VH 14	0299700000
	Fixing screw				BS M 4 x 20	0362800000
	Lock washer				SS M 4	0136400000
	Insulation sleeve					

## Plugs

BST 4	Lock-out device	SAKR	SAKR-D	SAKC 4	SAKC 10		
BST 4	WTR/SAKR	9525900000		BST 4 red	1339060000		
Dummy plug	Test plug	PS 2.3	0180400000	PS 2.3	0180400000		
	Socket				PS 4	0299600000	
	Diode plug without diode		DLS 2		STB 13.5	0135200000	
	Diode plug with diode 1N4007		DLS 2				
	Disconnecter plug (spare)			TST	1380600000	TST	0462700000

## Extraction Tool

					0623060000
--	--	--	--	--	------------

## Marking Tags

Note: Part numbers are shown for a single card of pre-printed tags numbered 1-50.	Consecutive horizontal	Consecutive vertical	SAKR	SAKR-D	SAKC 4	SAKC 10
	DEK 5/6.5	0468160001	DEK 5/6.5	0468160001	DEK 5/6.5	0468160001
	DEK 5/6.5	0468260001	DEK 5/6.5	0468260001	DEK 5/6.5	0468260001

<sup>‡</sup>See Accessories section for additional information.  
 \*Without DLS  
 \*\*With empty DLS  
 \*\*\*With DLS 1N4007 (Diode)