


## Hook Sheaves for any Greenlee cable puller

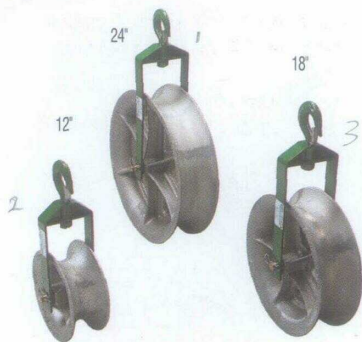

- For use with any Greenlee cable puller.
- Strong, welded steel frames.
- Forged steel closure type hooks with 1" (25.4 mm) opening.
- All three sheaves are aluminum alloy with self-lubricating bearings.

Sheave Diameter	8012 / 00872 12" (304.8 mm)	8018 / 00873 18" (457.2 mm)	8024 / 00874 24" (609.6 mm)
Description	Cat./UPC No.	Cat./UPC No.	Cat./UPC No.
Roll Pin	50700	50700	50700
Sheave Pin	00838	00846	00850
Sheave Pin Clip	50302	50302	50302
Sheave Unit	00843	00844	00845
Yoke Frame	00854	00855	00856

### SPECIFICATIONS

Cat./UPC No.	Outside Diameter	Inside Radius	Width	Weight	Maximum Rated Capacity
8012/ 00872	12" (304.8 mm)	3 7/8" (98.4 mm)	5" (127 mm)	28 lbs (12.7 kg)	8,000 lbs. (35.8 kN)
8018/00873	18" (457.2 mm)	7" (177.8 mm)	6" (152.4 mm)	44 lbs (19.9 kg)	8,000 lbs. (35.8 kN)
8024/00874	24" (609.6 mm)	9 7/8" (250.8 mm)	6 1/2" (165.1 mm)	67 lbs (30.3 kg)	8,000 lbs. (35.8 kN)

## Right Angle Twin Yoke Sheave for Easy Tugger™ and Tugger®



- 9-13/16" (249 mm) minimum radius.
- Strong welded steel yokes.
- Forged steel closure type hook with 1" (25.4 mm) opening.
- 5" (127 mm) wide aluminum alloy sheave with self-lubricating bearings.
- Yokes rotate independently to fit various setups.
- Use with any cable puller whose maximum pulling force is 4,000 lbs. (17.8 kN) or less.


Cat. No.	UPC No.	Description
639	17265	Right Angle Twin Yoke Sheave with 9-13/16" (249 mm) minimum radius

### SPECIFICATION

**Maximum Rated Capacity:** 4,000 lbs. (17.8 kN)  
**Weight:** 45 lbs. (20.4 kg)

Sheave Description	639 / 17265 Cat./UPC No.	Quantity
Sheave Pin	17266	1
Sheave Pin Clip	50302	2
Sheave	15364	1
Sheave Bushing	16798	2
Yoke Frame	17299	2

## Triple Sheave Cable Guide for Easy Tugger™, Tugger® and Super Tugger®

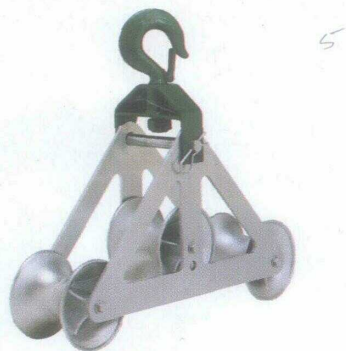

- Adjustable center sheave for 19-1/2" (495 mm) or 36" (914 mm) radius.
- Forged steel closure type hook with 1-1/2" (38.1 mm) opening.
- Aluminum frames for light weight.
- Steel yoke is pinned for easy removal.
- 21-7/8" (555 mm) high, 24" (610 mm) long, 7-3/8" (187 mm) wide with 5" (127 mm) wide sheaves.
- Use with any cable puller whose maximum pulling force is 6,500 lbs. (28.9 kN) or less

Cat. No.	UPC No.	Description
6036	31569	Triple Sheave Cable Guide

### SPECIFICATIONS

**Maximum Rated Capacity:** 6,500 lbs. (28.9 kN)  
**Weight:** 28 lbs. (12.7 kg)

Sheave Description	6036 / 31569 Cat./UPC No.	Quantity
Sheave Axle	31573	3
Sheave Bolt	53091	6
Sheave Bolt Washer	51434	6
Sheave Pin	29600	1
Sheave Pin Clip	50302	2
Sheave Bushing	16798	6
Sheave	15362	3
Instruction Manual	999 8051.7	1