


4-IN. LINE VOLTAGE RECESSED PROGRAM

line voltage **120V**

4-Inch Line Voltage Housings

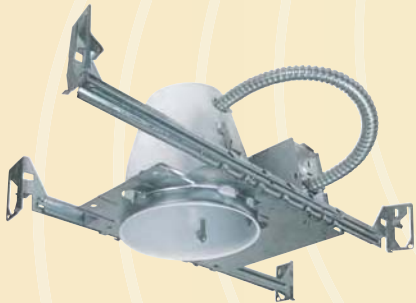

HV4-HR01-NC
4" New Construction Housing

Features

- Thermally protected to prevent over heating.
- For use with Liteline medium base lamps.
- Hanger bars are for use with T-bars or can be connected directly to the wood joist.
- Fits up to 24" joist construction / T-bar.
- Not for use in insulated ceilings.
- cUL listed for damp locations.



HV4-HR02-RM
4" Remodel Housing

Features

- Thermally protected to prevent over heating
- Quick snap on Junction Box cover for easy wiring
- Allows for Branch wiring
- Quick push-in connectors
- Dimmable when using incandescent/halogen lamps



HV4-HR05-IC
4" Housing for Insulated
Ceilings

Features

- Thermally protected to prevent over heating.
- For use with various Liteline medium base lamps.
- Insulated Ceiling housing has one of the smallest boxes on the market.
- Airtight fixture.
- Fits up to 24" joist construction.
- Can be completely covered by insulation



Applications

- **New Construction, Remodel and I.C applications**
- **T-Bar ceilings**



VBE-1
Vapour Barrier
Extender

Features

- Constructed of PVC, Rated for 90°C
- Flat flange all around to allow for better fit to joist
- Help control moisture in these areas: Ceilings, Basements crawl spaces, floors slab-on-grade foundations, and walls

Features & Benefits of 4-inch Trims

- **Cones/Baffles:** Airtight, Baffles and Reflectors
- **Shower:** Fresnel, Dropped Albalite or Opal glass with Neoprene gaskets
- **Gimbles:** 35° angular adjustment



Lamps (Line Voltage)

- **MR16 E26, CF, R20/PAR20, 50W max.**



MR16 E26



CFL



R20




PAR20

4-IN. LINE VOLTAGE RECESSED PROGRAM

line voltage **120V**

4-Inch Line Voltage Housings

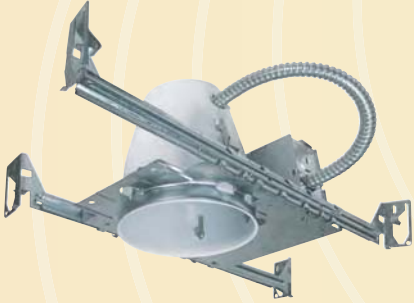

HV4S-HR01-NC
4" Remodel Housing with magnetic transformer

Features

- Thermally protected to prevent over wattage re-lamping.
- For use with Liteline medium base lamps.
- New Construction housing has adjustable hanger bars with captive nails.
- Adjustable socket height.
- Fits up to 24" joist construction.
- Not for use in insulated ceilings.



HV4S-HR02-RM
4" Remodel Housing with adjustable socket height

Features


- 4-knock out holes
- Thermally protected to prevent over heating.
- For use with MR16 lamps 50W max., 12V
- Low voltage MR16 bulbs provide brighter, whiter light with one third more light per watt than conventional bulb.



HV4S-HR05-IC
4" Housing for Insulated Ceilings, with adjustable socket height

Features

- Thermally protected to prevent over heating.
- For use with various Liteline medium base lamps.
- Insulated Ceiling housing has one of the smallest boxes on the market.
- Airtight with adjustable socket height.
- Fits up to 24" joist construction.
- Can be completely covered by insulation

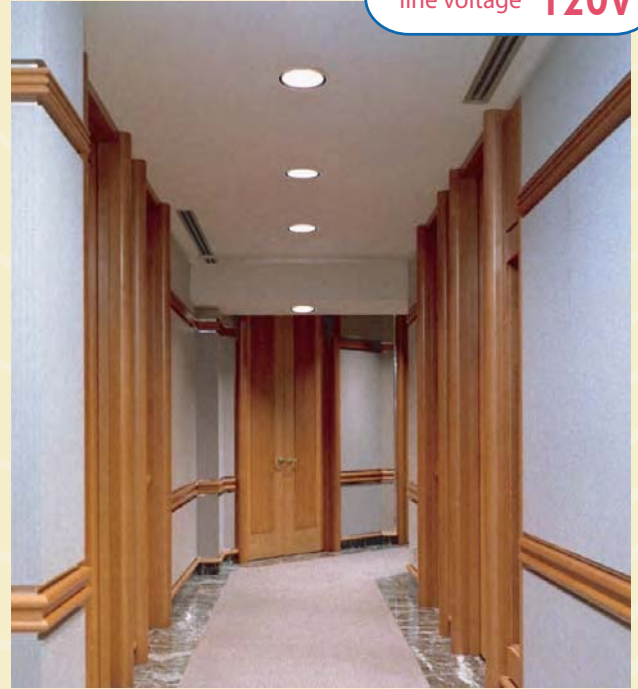

Applications

- **New Construction, Remodel and I.C applications**
- **Insulated ceilings**
- **T-Bar ceilings**



VBE-1
Vapour Barrier Extender

Features

- Constructed of PVC, Rated for 90°C
- Flat flange all around to allow for better fit to joist
- Help control moisture in these areas: Ceilings, Basements crawl spaces, floors slab-on-grade foundations, and walls

Lamps (Line Voltage)

- **PAR20, R20, 50W max.**



PAR20



R20

4-IN. LINE VOLTAGE RECESSED PROGRAM

line voltage **120V**

4-Inch Line Voltage Housings



HV4-HR02C-RM
4" Remodel Housing
with screw down clamp

Features


- Thermally protected to prevent over heating
- Quick push-in connectors for easy wiring
- Comes with flexible steel conduit
- Quick screw down installation
- Light weight
- Dimmable when used with incandescent/halogen lamps



HV4-HR02AC-RM
4.25" Aluminum Remodel
Housing with 17" long BX
cable & mounting clips


Features

- Thermally protected to prevent over heating
- Flexible conduit for use in soffits
- Light weight
- 1/6-inch BX cable
- Provided with 3 stainless steel spring studs
- Dimmable
- Convert to new construction by using mounting plate (P-3500) and hanger bars(HV5-5999-NCP).

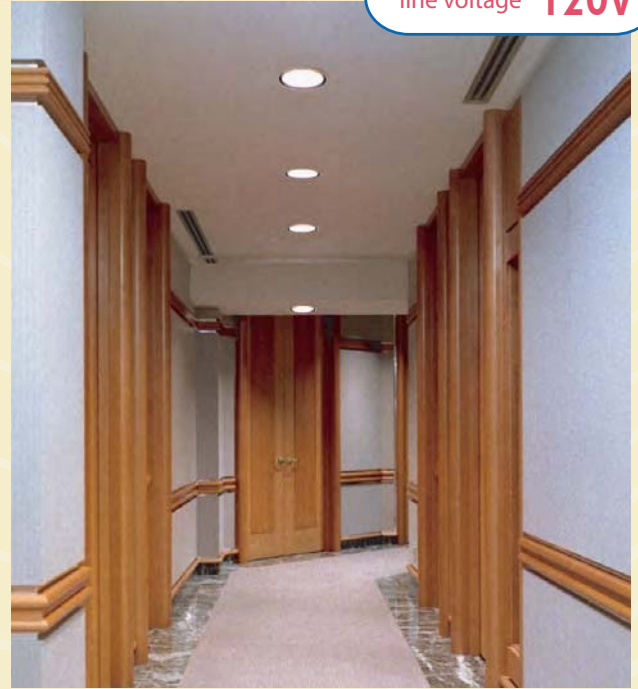


Applications

- Remodel applications
- Insulated or non insulated ceilings
- T-Bar ceilings

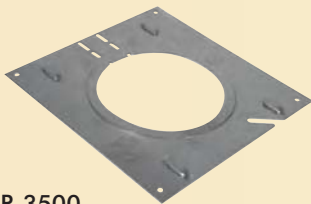

P-3500
3.5" New Construction pre-mounting
plate for use with 3.5" or 4" remodel
housings used in new construction
applications

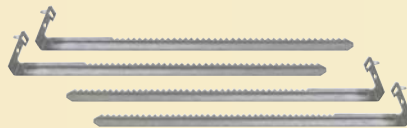

HV5-5999-NCP
Hanger bars for use with New Construction
Housing Plate

Lamps (Line Voltage)

- MR16 E26, CF, R20/PAR20, PAR30L and BR30, 75W max.



MR16 E26



CFL



R20



PAR20



PAR30L



BR30



4-IN. LINE VOLTAGE RECESSED PROGRAM

HOUSINGS



PART NO.	DESCRIPTION	UPC	CASE QTY
HV4-HR01-NC	4" New Construction Housing. Use with MR16 E26, R20/PAR20, 50W max., LMP16E26CF11B, 11W max., 120V	7-71250-80600-0	6



HV4-HR02-RM	4" Remodel Housing. For use with MR16 E26, R20/PAR20, 50W max., LMP16E26CF11B, 11W max., 120V	7-71250-80601-7	6
-------------	---	-----------------	---



HV4-HR02C-RM	4" Remodel Housing with screw down clamp. For use with MR16 E26, R20/PAR20, 50Wmax., LMP16E26CF11B, 11W max., 120V	7-71250-91092-9	6
--------------	--	-----------------	---



HV4-HR02AC-RM	4.25" Aluminum Remodel Housing with 17" long BX cable. For use with PAR30L, BR30 lamp, 75W max. Comes with mounting clips	7-71250-91003-5	6
---------------	---	-----------------	---



HV4-HR05-IC	4" Housing for Insulated Ceilings. For use with MR16 E26, R20/PAR20, 50W max., LMP16E26CF11B, 11W max., Air tight housing	7-71250-80602-4	6
-------------	---	-----------------	---



HV4S-HR01-NC	4" New Construction Housing with adjustable socket height. For use with MR16 E26, R20/PAR20, 50Wmax., 120V	7-71250-80600-0	6
--------------	--	-----------------	---



HV4S-HR02-RM	4" Remodel Housing with adjustable socket height For use with MR16 E26, R20/PAR20, 50W max., 120V	7-71250-91146-9	6
--------------	---	-----------------	---



HV4S-HR05-IC	4" Housing for Insulated Ceilings, with adjustable socket height. Air tight housing. For use with MR16 E26, R20/PAR20, 50W max., 120V	7-71250-91070-7	6
--------------	---	-----------------	---

TRIMS



PART NO.	DESCRIPTION	TRIM/BAFFLE COLOUR	UPC	CASE QTY
GR-TH01-BK GR-TH01-WH	Round stepped baffle with white trim ring For use with MR16 75W lamps	Black White	7-71250-30103-1 7-71250-30104-8	6



GR-TH02-G GR-TH02-S	Round specular baffle. For use with MR16 75W lamps.	Gold Silver	7-71250-30106-2 7-71250-30105-5	6
------------------------	--	----------------	------------------------------------	---



GR-TH03	Adjustable slot aperture (White) For use with MR16 75W lamps	White	7-71250-30107-9	6
---------	---	-------	-----------------	---



4-IN. LINE VOLTAGE RECESSED PROGRAM

TRIMS



PART NO.	DESCRIPTION	TRIM/BAFFLE COLOUR	UPC	CASE QTY
GR-TH04-BK	Eyeball Baffle	Black		6
GR-TH04-WH	For use with MR16 E26 50W max., 12V	White		



GR-TH18-NB-AB	Tilting round front load gimble.	Antique Brass	7-71250-91114-8	6
GR-TH18-NB-BB	For use with MR16 75W lamps	Brushed Brass	7-71250-91118-6	
GR-TH18-NB-BK		Black	7-71250-91110-0	
GR-TH18-NB-BN		Brushed Nickel	7-71250-91116-2	
GR-TH18-NB-WH		White	7-71250-91112-4	



GR-TH18R-AB	Tilting round front load gimble.	Antique Brass	7-71250-91279-4	6
GR-TH18R-BK	For use with MR16 75W lamps	Black	7-71250-91044-8	
GR-TH18R-BN		Brushed Nickel	7-71250-91271-8	
GR-TH18R-ST		Stainless Steel	7-71250-91285-5	
GR-TH18R-WH		White	7-71250-91045-5	



GR-TH18R3-AB	Tilting round front load gimble.	Antique Brass		6
GR-TH18R3-BK	For use with MR16 75W lamps	Black	7-71250-91591-7	
GR-TH18R3-BN		Brushed Nickel	7-71250-91592-4	
GR-TH18R3-MIV		Matte Ivory	7-71250-91685-3	
GR-TH18R3-ST		Stainless		
GR-TH18R3-WH		White	7-71250-91191-9	



GR-TH19-WH	Egress / Regress rotating down light or Wall Washer. For use with MR16 50 W lamps	White	7-71250-90072-2	6
------------	---	-------	-----------------	---



GR-TH313-MIV	Tilting round Matte Ivory gimble. For use with MR16 50W lamps.	Matte Ivory	7-71250-91046-2	6
--------------	--	-------------	-----------------	---



HV4-TH4013-BN	White shower trim with Frosted Glass lens and neoprene gasket. For use with MR16, 35W lamp	Brushed Nickel	7-71250-91724-9	6
HV4-TH4013-WH		White	7-71250-90610-6	



HV4-TH4019-WH	White shower trim with Frosted Glass lens and neoprene gasket. For use with MR16 35W lamps	White	7-71250-91150-6	6
---------------	--	-------	-----------------	---



HV4-TH4001-BK	Stepped Baffle	Black	7-71250-80603-1	6
HV4-TH4001-WH	For use with PAR20/R20, 50W max. or CFQ13W/GX23, 13W max.	White	7-71250-80604-8	



HV4-TH4002-BK	Stepped Baffle	Black	7-71250-80605-5	6
HV4-TH4002-CH	For use with PAR20/R20, 50W max. or CFQ13W/GX23, 13W max.	Chrome	7-71250-80607-9	
HV4-TH4002-PB		Polished Brass	7-71250-80608-6	
HV4-TH4002-WH		White	7-71250-80606-2	



HV4-TH4004-WH	Tilting Eyeball	White	7-71250-80610-9	6
	For use with R20/PAR20, 50W max.			



4-IN. LINE VOLTAGE RECESSED PROGRAM

TRIMS



PART NO.	DESCRIPTION	TRIM/BAFFLE COLOUR	UPC	CASE QTY
HV4-TH4007-WH	Smooth White Baffle For use with R20/PAR20, 50W max., E26 Compact Fluorescent lamp, 11W max.	White	7-71250-90455-3	6



HV4-TH4014-WH	White Shower Trim equipped with Frosted Glass Lens and Neoprene Gasket. For use with PAR20, 50W max.	White	7-71250-91147-6	6
---------------	--	-------	-----------------	---



HV4-TH4018-AB	Tilting Round Gimbal Ring For use with PAR20, 50W max.	Antique Brass	7-71250-91148-3	6
HV4-TH4018-BB		Brushed Brass	7-71250-91121-6	
HV4-TH4018-BK		Black	7-71250-91272-5	
HV4-TH4018-BN		Brushed Nickel	7-71250-91072-1	
HV4-TH4018-WH		White	7-71250-80611-6	




HV4-TH4018R-BN	Tilting Round Rear Load Gimbal For use with PAR20, 50W max.	Brushed Nickel	7-71250-91322-7	6
HV4-TH4018R-ST		Stainless Steel	7-71250-91149-0	
HV4-TH4018R-WH		White	7-71250-91323-4	

ACCESSORIES




PART NO.	DESCRIPTION	UPC	CASE QTY
VBE-1	Vapour Barrier Extender, for use with all Liteline recessed IC fixtures to prevent moisture from entering into the attic. Material rated to 90° C	7-71250-90494-2	6



P-3500	3.5" New construction premounting plate. Can be used with 3.5" or 4" remodel housings. in New Construction applications	7-71250-90985-5	6
--------	---	-----------------	---



P-4000	4" New construction premounting plate. For use with GR-HR04C20-RM remodel housings.	7-71250-90607-6	24
--------	--	-----------------	----



HV5-5999-NCP	Hanger Bars for use with New Construction Housing plate.	7-71250-80703-8	12
--------------	--	-----------------	----



LMP16E26AC-50-BX	50W Medium Base, 120V lamp	7-71250-90151-4	20
------------------	----------------------------	-----------------	----



R20-50W120VE26RFL	30W R20, 120V Reflector lamp	7-71250-90535-2	100
-------------------	------------------------------	-----------------	-----



4-IN. LINE VOLTAGE RECESSED PROGRAM

ACCESSORIES



PART NO.	DESCRIPTION	UPC	CASE QTY
PAR20-50W130VE26FL	50W PAR20. 120V Flood Lamp	7-71250-90362-4	10



LMP16E26CF11BX	11W Compact Fluorescent ,120V lamp	7-71250-90982-4	10
----------------	------------------------------------	-----------------	----



PAR30-75W120VE26FL	75W PAR30, 120V lamp	7-71250-90130-9	50
--------------------	----------------------	-----------------	----



PAR30L-75W120VE26FL	75W PAR30 Long Neck, 120V lamp	7-71250-90508-6	50
---------------------	--------------------------------	-----------------	----



BR30-65W12VRFL	65W BR30, 120V Reflector lamp	7-71250-90549-9	50
----------------	-------------------------------	-----------------	----



LMP16E26AC-50-BX	50W MR16 Medium Base, lamp	7-71250-90151-4	20
------------------	----------------------------	-----------------	----