





KLEIN BOLT CUTTERS

Bolt Cutters

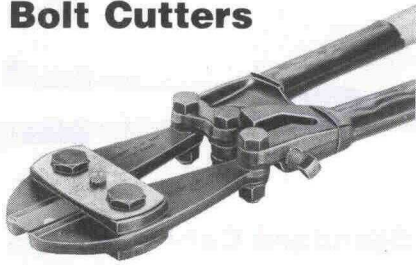

Center-cut jaws are precision ground for cutting efficiency and durability.

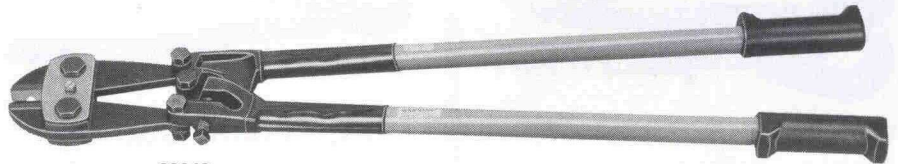

63342

Bolt Cutters with Steel or Fiberglass Handles

Strong, lightweight, general-purpose bolt cutters in six sizes to 42". Rugged fiberglass handles on 18" to 36" sizes, tubular steel handles on 14" to 42" sizes. All have heavy vinyl grips for comfort and slip resistance. All-purpose, center-cut jaws for soft, medium and hard metals. Drop-forged, alloy tool steel jaws are precision


ground for sure, efficient cutting and long life. Lockplate reinforcement prevents jaw bolts from loosening or turning, keeps jaws in correct alignment. One adjustment re-aligns cutting edges. Three-point toggle joint multiplies 50 pounds of hand pressure on handles to 4,000 pounds at cutting jaws.

Replacement Bolt Cutter Heads (complete).


Cat. No.	Fits Klein No.
63214	63314
63218	63118, 63318
63224	63124, 63324
63230	63130, 63330
63236	63136, 63336
63242	63342

Steel Handles			Fiberglass Handles			Cutting Capacities	
Cat. No.	Overall Length	Approx. Weight	Cat. No.	Overall Length	Approx. Weight	SOFT AND MEDIUM HARD MATERIALS*	HARD MATERIALS**
63314	14" (356 mm)	2 ³ / ₄ lbs. (1 kg)	-	-	-	5/16" (8 mm)	3/16" (5 mm)
63318	18" (457 mm)	3 ¹ / ₂ lbs. (2 kg)	63118	18 ¹ / ₄ " (464 mm)	3 ¹ / ₂ lbs. (2 kg)	3/8" (10 mm)	1/4" (6 mm)
63324	24" (610 mm)	5 ¹ / ₄ lbs. (3 kg)	63124	24 ¹ / ₂ " (622 mm)	4 ¹ / ₂ lbs. (2 kg)	7/16" (11 mm)	5/16" (8 mm)
63330	30" (762 mm)	8 ¹ / ₂ lbs. (4 kg)	63130	30 ¹ / ₂ " (775 mm)	7 ¹ / ₂ lbs. (4 kg)	1/2" (13 mm)	3/8" (10 mm)
63336	36" (914 mm)	12 ⁷ / ₈ lbs. (6 kg)	63136	36 ¹ / ₂ " (927 mm)	11 ¹ / ₂ lbs. (5 kg)	9/16" (14 mm)	7/16" (11 mm)
63342	42" (1067 mm)	17 ¹ / ₈ lbs. (8 kg)	-	-	-	1 ¹ / ₁₆ " (18 mm)	1/2" (13 mm)

* Up to Brinell 300, Rockwell C31.
** Up to Brinell 400, Rockwell C42.

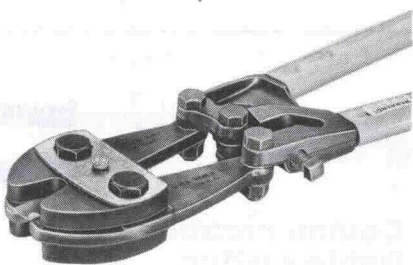

Heavy-duty side plates keep jaws aligned. No blade skew even under severe loads.

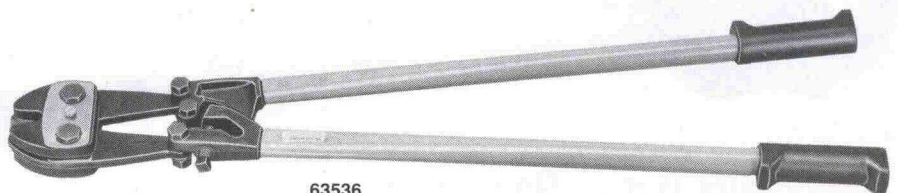

63536

Heavy-Duty Bolt Cutters for Severe Service Use

These cutters are designed for constant use in the most demanding applications. They feature heavy-duty side plates that keep jaws aligned for clean, quick cuts through reinforcing rod, wire mesh, guy strand and many other materials too tough

for standard bolt cutters. Four sizes, all with steel handles and precision ground, drop-forged alloy tool steel jaws. Lever design creates 4,000 lbs. jaw pressure with 50 lbs. hand pressure. Handles have heavy vinyl grips for comfort and slip resistance.

Steel Handles			Cutting Capacities		Replacement Bolt Cutter Heads (complete) Cat. No.
Cat. No.	Overall Length	Approx. Weight	SOFT AND MEDIUM HARD MATERIALS*	HARD MATERIALS**	
63524	24" (610 mm)	6 ¹ / ₂ lbs. (3 kg)	7/16" (11 mm)	5/16" (8 mm)	63624
63530	30" (762 mm)	10 ³ / ₄ lbs. (5 kg)	1/2" (13 mm)	3/8" (10 mm)	63630
63536	36" (914 mm)	15 ¹ / ₄ lbs. (7 kg)	9/16" (14 mm)	7/16" (11 mm)	63636
63542	42" (1067 mm)	20 lbs. (9 kg)	1 ¹ / ₁₆ " (18 mm)	1/2" (13 mm)	63642

* Up to Brinell 300, Rockwell C31.
** Up to Brinell 400, Rockwell C42.