



Turnlok® Devices Receptacles, Connectors, Plugs, Inlets


4 Wire Grounded 50A, 125/250V; 50A 3ø, 250V; 50A, 250VDC 600VAC




Corrosion Resistant Receptacle



Corrosion Resistant Connector



Corrosion Resistant Plug




Corrosion Resistant Flanged Inlet

Catalog Number	Rating A. V.	Description	Cord Diameter	3rd Party Compliance		
				UL498	FSUL WC596	CSA
Receptacles						
CR6369	50 125/250	Corrosion Resistant		•	•	•
CS6369	50 125/250	California Standard		•	•	•
CS8369	50 3ø, 250	California Standard		•	•	•
CS8169	50 3ø, 480	California Standard		•	•	•
3769	50 250VDC, 600VAC	Corrosion Resistant		•	•	•
*7379	50 250VDC, 600VAC	Corrosion Resistant		•	•	•
Connectors						
CR6364	50 125/250	Corrosion Resistant	.680"-1.125"	•	•	•
CS6364	50 125/250	California Standard	.680"-1.125"	•	•	•
CS8364	50 3ø, 250	California Standard	.680"-1.125"	•	•	•
CS8164	50 3ø, 480	California Standard	.680"-1.125"	•	•	•
3764	50 250VDC, 600VAC	Corrosion Resistant	.680"-1.125"	•	•	•
*7764	50 250VDC, 600VAC	Corrosion Resistant	.680"-1.125"	•	•	•
Plugs						
CR6365	50 125/250	Corrosion Resistant	.680"-1.125"	•	•	•
CS6365	50 125/250	California Standard	.680"-1.125"	•	•	•
CS8365	50 3ø, 250	California Standard	.680"-1.125"	•	•	•
CS8165	50 3ø, 480	California Standard	.680"-1.125"	•	•	•
3765	50 250VDC, 600VAC	Corrosion Resistant	.680"-1.125"	•	•	•
*7765	50 250VDC, 600VAC	Corrosion Resistant	.680"-1.125"	•	•	•
Flanged Inlets						
CR6375	50 125/250	Corrosion Resistant		•	•	•
CS6375	50 125/250	California Standard		•	•	•
CS8375	50 3ø, 250	California Standard		•	•	•
CS8175	50 3ø, 480	California Standard		•	•	•
3775	50 250VDC, 600VAC	Corrosion Resistant		•	•	•
*7958	50 250VDC, 600VAC	Corrosion Resistant		•	•	•

*Devices for replacement use only in existing installations.

Catalog Number	Description
Accessories	
7770	Weatherproof Cover for 50A Locking Receptacles, Thermoplastic
CR7716-N	Weatherproof Boot, 50A Locking Connector
CR7717-N	Weatherproof Boot, 50A Locking Plug
S750	Stainless Steel Plate for 50A Locking Receptacle (style 97)
PSLD	Lockout Device

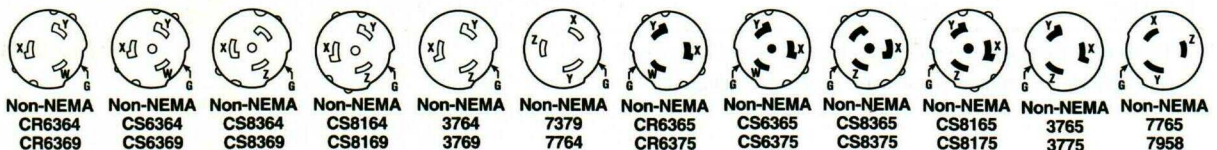

Turnlok® Devices Inlets & Horsepower Rating Chart Product Specifications & Performance

2 Pole, 3 Wire Grounding 15A, 20A, 125V 250V



50 Amp Inlets

Inlets	
Flanged Casing	Nylon
Contact Carrier	Nylon
Blades	Brass
Terminal Clamps	Brass
Terminal Screws	Brass
Assembly Screws	Nickel-Plated Steel
Performance	
Electrical	
Dielectric Withstand Voltage	3000V minimum
Maximum Working Voltage	600VAC
Current Interrupting	Certified for current interrupting at full rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Terminal Accommodation	#10 AWG min. - #4 AWG max.
Product Identification	Amperage/Voltage, hot stamped onto face
Environmental	
Flammability	UL94 VO
Operating Temperature	Maximum Continuous: 75°C Minimum: -40°C without impact

Turnlok Horsepower Rating for NEMA Configuration Attachment Plugs & Receptacles

NEMA Configuration	AC HP Rating	NEMA Configuration	AC HP Rating
L1-15	1/2	L21-20	2
L5-15	1/2	L22-20	5
L6-15	1 1/2*	L5-30	2
L7-15	2	L6-30	2*
L2-20	2*	L7-30	3
L5-20	1	L8-30	5
L6-20	2*	L10-30	2 Line to Line*
L7-20	2		2 Line to Neutral
L8-20	3	L11-30	3
L10-20	2 Line to Line*	L12-30	10
	1 Line to Neutral	L14-30	2 Line to Neutral
L11-20	3	L15-30	3
L12-20	5	L16-30	10
L14-20	1 Line to Neutral	L18-30	3
L15-20	3	L19-30	10
L16-20	5	L21-30	3
L18-20	2	L22-30	10
L19-20	5		

*Suitable for 208V motor applications at the HP rating specified.