



Accessories – Special order only

Smoke Relay Modules:

- Activates or deactivates auxiliary devices such as bells, lights and ventilation systems.
- For use with all interconnected installations that contain smoke alarms and smoke / CO combo units and heat detectors.
- The power supply portion of this module can be used with manual pull stations, flow switches, and spot type heat detectors.

CO Relay Modules:


- Activates or deactivates auxiliary devices such as bells, lights and ventilation systems.
- For use with all interconnected installations that contain CO alarms and smoke / CO combo units.
- CO relay modules should not be used to connect groups of CO alarms to an alarm panel or to interconnect groups of CO alarms together.

Remote Visual Signaling Device:


- Bright 177 Candela Strobe Light – Provides visual alarm to the hearing impaired. Strobe light is triggered when any interconnectable smoke, heat, or CO alarm with the home is activated.
- 1 Hz Flash Rate – Light level proven effective in alerting the hearing impaired. Sixty flashes per minute – meets recommended ULC standards. Different flash rate for CO and smoke situations.
- No relay required.

Heat Detector:

- Test Button – Tests heat detector circuitry and horn.
- 9V Battery Backup – For continuous protection in case of power failure.
- Alarm sounds when air temperature rises above 135°F. Ideal for garages and attics.
- No relay required.

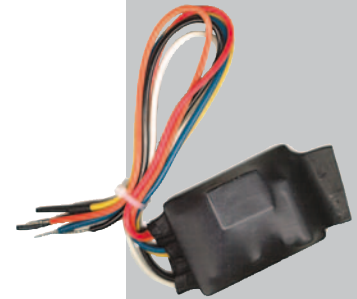

SM120X

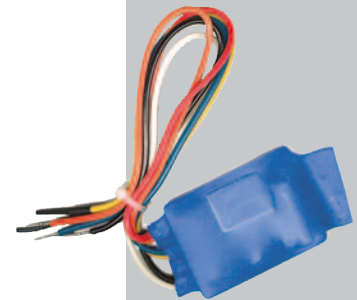

CO120X



SL1771



HD135F