



225380

Tel: (450) 449-0412 ; 1-866-540-0412 Fax: (450)449-9115 ; 1-866-499-9115




E153598

# SÉRIES TMB SERIES

## SPÉCIFICATIONS ÉLECTRIQUES / ELECTRICAL SPECIFICATIONS

PHASE:	<input type="text" value="1"/>	TENSION / Y / PRIMARY PRIMAIRE VOLTAGE	<input type="checkbox"/> A = 12	<input type="checkbox"/> J = 347	TENSION / Z / SECONDARY SEC. VOLTAGE	<input type="checkbox"/> A = 12	<input type="checkbox"/> J = 347
FREQ.:	<input type="text" value="60 Hz."/>		<input type="checkbox"/> B = 24	<input type="checkbox"/> K = 380		<input type="checkbox"/> B = 24	<input type="checkbox"/> K = 380
CLASSE ISOL. INSUL. CLASS	<input type="text" value="B(130°C)"/>		<input type="checkbox"/> C = 12/24	<input type="checkbox"/> L = 347/380		<input type="checkbox"/> C = 12/24	<input type="checkbox"/> L = 347/380
ELEV. TEMP. TEMP. RISE	<input 80°c)"="" type="text" value("&lt;=""/>		<input type="checkbox"/> D = 16/32	<input type="checkbox"/> M = 416		<input type="checkbox"/> D = 16/32	<input type="checkbox"/> M = 416
NIV. DE BRUIT SOUND LEVEL	<input 40="" db."="" type="text" value("&lt;=""/>		<input type="checkbox"/> E = 120	<input type="checkbox"/> N = 208/416		<input type="checkbox"/> E = 120	<input type="checkbox"/> N = 208/416
			<input type="checkbox"/> F = 208	<input type="checkbox"/> O = 480		<input type="checkbox"/> F = 208	<input type="checkbox"/> O = 480
			<input type="checkbox"/> G = 240	<input type="checkbox"/> P = 240/480		<input type="checkbox"/> G = 240	<input type="checkbox"/> P = 240/480
			<input type="checkbox"/> H = 120/240	<input type="checkbox"/> Q = 600		<input type="checkbox"/> H = 120/240	<input type="checkbox"/> Q = 600
			<input type="checkbox"/> I = 277	<input type="checkbox"/> S = _____		<input type="checkbox"/> I = 277	<input type="checkbox"/> S = _____
			<input type="checkbox"/> U = 480/600				

PORTE-FUSIBLE PRI. ET SEC. DISPONIBLE/  
PRI. AND SEC. FUSE HOLDER AVAILABLE  
FUSE CLIP SUFFIXE/SUFFIX :  
XX : N/A      XQ : SEC. GLASS FUSE  
PX : PRI. FUSE    XK : SEC. MIDGET FUSE  
PQ : PRI.+SEC. GLASS FUSE  
PK : PRI.+SEC. MIDGET FUSE

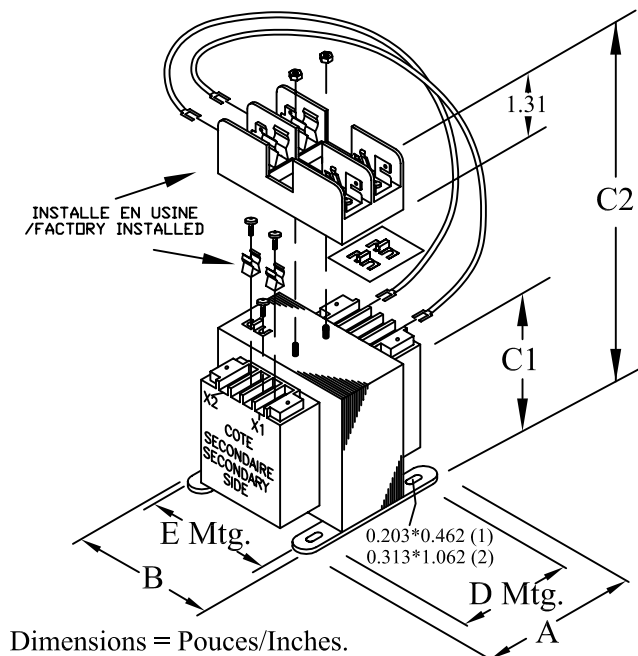

VA	A	B	C1	C2	D	E	LBS	KG
25	2.96	3.00	2.63	3.94	1.57	2.50	2.4	1.09
50	3.13	3.00	2.63	3.94	2.00	2.50	2.71	1.23
75	3.38	3.00	2.63	3.94	2.19	2.50	3.22	1.46
100	3.50	3.38	2.94	4.25	2.19	2.81	4.01	1.82
150	3.63	3.75	3.25	4.56	2.19	3.13	5.22	2.37
200	3.68	3.75	3.25	4.56	2.81	3.13	5.51	2.50
250	4.00	4.50	3.88	5.19	2.44	3.75	8.02	3.64
350	4.44	4.50	3.88	5.19	3.19	3.75	9.41	4.27
500	5.27	4.50	3.88	5.19	3.75	3.75	13.1	5.95
750	6.50	5.25	4.50	5.81	4.88	4.38	22.7	10.3
1000	7.28	5.25	4.50	5.81	5.38	4.38	26.9	12.2

(1) 25 - 500VA (2) 750 - 1000VA ( TROUS DE MONTAGE / MOUNTING SLOTS )

Toutes les dimensions sont approximatives. Spécifications peuvent changer sans préavis.  
All dimensions and weights are approximate. Specifications may change without notice.

**TRANSFAB** **TMS**  
magnetic solutions

NUMÉRO DE MODÈLE:  
MODEL NUMBER:  
**TMB(VA)YZ**

ZONE	REV	REVISION	DESCRIPTION	DATE	APPROVAL APPROB.	Dessiné par: Drawn by: SS	DWG NO. TMB-FAMILY	REV 02
DATE: MARCH/26/08					PAGE: 1 de 1			