

Conduit and Cable

Conduit Supports





Fig. 1

Features

- Available for 3/8 in. through 2 in. trade sizes for EMT, flexible conduit and MC/AC cable
- Available with either a plain hole for 1/4 in. bolt or a 1/4 in.-20 thread impression

**No tools needed!
Finger friendly design!**



- Shape of clip and clasp mechanism allows for hand installation (no tools needed)
- Unique clasp design has an aggressively angled tab and receiving hole to provide consistent, easy clasping of the clip
- Supports 100 lb. static load limit in the vertical position. Supports 25 lb. static load limit in the horizontal position.
- Unique finger grips on the ends of the clip provide easy grip for hand installation, or easy grip of pliers when using pliers to install



Cat. No.	Fig. No.	Conduit Size	Mounting Hole	Qty. Per Box
Conduit Clips				
SSF-CC3/8	1	14-2 thru 12-3 MC/AC Cable and 3/8 in. Conduits	9/32 in. Plain	100
SSF-CC1/2 3/4	1	1/2 in. -3/4 in.		
SSF-CC1	1	1 in.		
SSF-CC1 1/4	1	1-1/4 in.		
SSF-CC1 1/2	1	1-1/2 in.		
SSSF-CC2	1	2 in.		
SSF-CC3/8T	1	14-2 thru 12-3 MC/AC Cable and 3/8 in. Conduits	1/4 in.-20 Thread impression	
SSF-CC1/2 3/4T	1	1/2 in. -3/4 in.		
SSF-CC1T	1	1 in.		
SSF-CC1 1/4T	1	1-1/4 in.		
SSF-CC1 1/2T	1	1-1/2 in.		
SSF-CC2T	1	2 in.		

Features

- Available for 1/2 in. through 1 in. EMT and rigid conduit
- Available with either a plain hole for 1/4 in. bolt or a 1/4 in.-20 thread impression
- Supports ultimate static load limit 25 lb. in the vertical position. Supports ultimate static load limit 15 lb. in the horizontal position.






Fig. 1

Cat. No.	Fig. No.	Conduit Size (in.)	Mounting Hole	Qty. Per Box
Conduit Clips				
SSF-CS1/2	1	1/2	9/32 in. Plain	100
SSF-CS3/4	1	3/4		
SSF-CS1	1	1		
SSF-CS1/2T	1	1/2	1/4 in.-20 Thread impression	
SSF-CS3/4T	1	3/4		
SSF-CS1T	1	1		

Conduit and Cable

Conduit Supports



Features

- Available with Spring Steel Conduit Clip bottom mounted or side mounted
- Available for 3/8 in. through 2 in. trade sizes for EMT, rigid, flexible conduit and MC/AC cable
- Fits beam flanges 1/8 in. through 3/4 in. thick
- Will pivot through 360°
- Fig. 1 supports 75 lb. static load limit
- Fig. 2 supports 25 lb. static load limit
- Installs easily with a hammer and pliers




Fig. 1




Fig. 2



Cat. No. Fig. No. 1	Cat. No. Fig. No. 2	Description	Qty. Per Box
Flange Mount Conduit Clips			
SSF-CC3/8-H1/4	SSF-CC3/8-F1/4	14-2 thru 12-3 MC/AC cable and 3/8 in. conduits to 1/8 in. to 1/4 in. flanges and 3/8 in. conduits	25
SSF-CC1/2 3/4-H1/4	SSF-CC1/2 3/4-F1/4	1/2 in. conduit to 3/4 in. conduit to 1/8 in. to 1/4 in. flanges	
SSF-CC1-H1/4	SSF-CC1-F1/4	1 in. conduit to 1/8 in. to 1/4 in. flanges	
SSF-CC1 1/4-H1/4	SSF-CC1 1/4-F1/4	1-14 in. conduit to 1/8 in. to 1/4 in. flanges	
SSF-CC1 1/2-H1/4	SSF-CC1 1/2-F1/4	1-12 in. conduit to 1/8 in. to 1/4 in. flanges	
SSF-CC2-H1/4	SSF-CC2-F1/4	2 in. conduit to 1/8 in. to 1/4 in. flanges	
SSF-CC3/8-H1/2	SSF-CC3/8-F1/2	14-2 thru 12-3 MC/AC cable and 3/8 in. conduits to 5/16 in. to 1/2 in. flanges	
SSF-CC1/2 3/4-H1/2	SSF-CC1/2 3/4-F1/2	1/2 in. conduit to 3/4 in. conduit to 5/16 in. to 1/2 in. flanges	
SSF-CC1-H1/2	SSF-CC1-F1/2	1 in. conduit to 5/16 in. to 1/2 in. flanges	
SSF-CC1 1/4-H1/2	SSF-CC1 1/4-F1/2	1-14 in. conduit to 5/16 in. to 1/2 in. flanges	
SSF-CC1 1/2-H1/2	SSF-CC1 1/2-F1/2	1-12 in. conduit to 5/16 in. to 1/2 in. flanges	
SSF-CC2-H1/2	SSF-CC2-F1/2	2 in. conduit to 5/16 in. to 1/2 in. flanges	
SSF-CC3/8-H3/4	SSF-CC3/8-F3/4	4-2 thru 12-3 MC/AC cable and 3/8 in. conduits to 9/16 in. to 3/4 in. flanges	
SSF-CC1/2 3/4-H3/4	SSF-CC1/2 3/4-F3/4	1/2 in. conduit to 3/4 in. conduit to 9/16 in. to 3/4 in. flanges	
SSF-CC1-H3/4	SSF-CC1-F3/4	1 in. conduit to 9/16 in. to 3/4 in. flanges	
SSF-CC1 1/4-H3/4	SSF-CC1 1/4-F3/4	1-1/4 in. conduit to 9/16 in. to 3/4 in. flanges	
SSF-CC1 1/2-H3/4	SSF-CC1 1/2-F3/4	1-1/2 in. conduit to 9/16 in. to 3/4 in. flanges	
SSF-CC2-H3/4	SSF-CC2-F3/4	2 in. conduit to 9/16 in. to 3/4 in. flanges	

Features

- Available with Spring Steel Conduit Clip bottom mounted or side mounted
- Available for 1/2 in. through 1 in. EMT and rigid conduit
- Fits beam flanges 1/8 in. through 3/4 in. thick.
- Will pivot 360°
- Fig. 1 supports 25 lb. static load limit
- Fig. 2 supports 15 lb. static load limit
- Requires only hammer to install





Fig. 1





Fig. 2

Cat. No.	Fig. No.	Description	Static Load Limit	Qty. Per Box
Flange Mount Snap-in Conduit Clips				
SSF-CS1/2-H1/4	1	1/2 in. conduit to 1/8 in. to 1/4 in. flanges	25	25
SSF-CS3/4-H1/4	1	3/4 in. conduit to 1/8 in. to 1/4 in. flanges		
SSF-CS1-H1/4	1	1 in. conduit to 1/8 in. to 1/4 in. flanges		
SSF-CS1/2-H1/2	1	1/2 in. conduit to 5/16 in. to 1/2 in. flanges		
SSF-CS3/4-H1/2	1	3/4 in. conduit to 5/16 in. to 1/2 in. flanges		
SSF-CS1-H1/2	1	1 in. conduit to 5/16 in. to 1/2 in. flanges		
SSF-CS1/2-H3/4	1	1/2 in. conduit to 9/16 in. to 3/4 in. flanges		
SSF-CS3/4-H3/4	1	3/4 in. conduit to 9/16 in. to 3/4 in. flanges		
SSF-CS1-H3/4	1	1 in. conduit to 9/16 in. to 3/4 in. flanges		
SSF-CS1/2-F1/4	2	1/2 in. conduit to 1/8 in. to 1/4 in. flanges		
SSF-CS3/4-F1/4	2	3/4 in. conduit to 1/8 in. to 1/4 in. flanges		
SSF-CS1-F1/4	2	1 in. conduit to 1/8 in. to 1/4 in. flanges		
SSF-CS1/2-F1/2	2	1/2 in. conduit to 5/16 in. to 1/2 in. flanges		
SSF-CS3/4-F1/2	2	3/4 in. conduit to 5/16 in. to 1/2 in. flanges		
SSF-CS1-F1/2	2	1 in. conduit to 5/16 in. to 1/2 in. flanges		
SSF-CS1/2-F3/4	2	1/2 in. conduit to 9/16 in. to 3/4 in. flanges		
SSF-CS3/4-F3/4	2	3/4 in. conduit to 5/16 in. to 3/4 in. flanges		
SSF-CS1-F3/4	2	1 in. conduit to 5/16 in. to 3/4 in. flanges		

Conduit and Cable



Features

FROM DROP WIRE OR FLANGE

- Attaches to #12 wire through 3/8 in. rod.
- Fits 1/8 in. to 3/8 in. flanges
- Provides attachment of conduit and boxes.
- Supports #10-24 and 1/4 in.-20 threaded bridle rings
- Assembles to support 1/2 in., 3/4 in. and 1 in. EMT and rigid conduit
- Also attaches to 1/4 in. and 3/8 in. threaded rod



Fig. 1




Fig. 2




Fig. 3

Cat. No.	Fig. No.	Description	Static Load Limit	Qty. Per Box
Multi-Function Utility Clip from Drop Wire or Flange				
SSF-CUC	1	Multi-function utility clip	50	100
SSF-CUC-S1/2	2	Utility clip to 1/2 in. conduit	15	25
SSF-CUC-S3/4	2	Utility clip to 3/4 in. conduit	15	25
SSF-CUC-S1	2	Utility clip to 1 in. conduit	15	25
SSF-CUC-C1/2 3/4	3	Utility clip to 1/2 in. or 3/4 in. conduit	25	25
SSF-CUC-C1	3	Utility clip to 1 in. conduit	25	25


Features

- Exclusive slot keeps drop wire centered
- Will not bend or deform drop wire
- Delivers faster installation
- Supports MC/AC, 14-2 through 12-3 cable and 1/2 in. EMT (0.433 in.-0.706 in. O.D.) from #8-#12 wire and 1/4 in. plain and threaded rod
- Eliminates the need to trap cable against drop wire
- Supports 25 lb. static load limit
- No tools required

New finger friendly design and exclusive center slot keeps drop wire centered.






Fig. 1



Cat. No.	Fig. No.	Description	Static Load Limit	Qty. Per Box
Cable from Drop Wire Support				
SSF-CB706	1	Cable from drop wire support	25	100

Conduit and Cable



Features

- CK Series attaches conduit (EMT, Rigid, ENT and Aluminum) to drop wire, rods or flanges
- Application “A” (vertical flange), supports 25 lb. static load limit
- Application “B” (horizontal flange), supports 100 lb. static load limit
- Application “C” (vertical drop wire), supports 50 lb. static load limit



Cat. No.	Fig. No.	Description	Qty. Per Box
Conduit Hangers from Flange, Wire or Rod			
SSF-CK1/2	1	Conduit hangers for flange wire or rod	100
SSF-CK3/4	1	Conduit hangers for flange wire or rod	
SSF-CK1	2	Conduit hangers for flange wire or rod	

Conduit Size	#10 & #12 Wire	#8 & #9 Wire	3/16 in. Plain Rod	1/4 in. Plain & Threaded Rod	3/8 in. Plain & Threaded Rod
Wire/Rod					
1/2 EMT	CK1/2	CK1/2	CK1/2	CK1/2	CK3/4
1/2 Rigid	CK1/2	CK1/2	CK1/2	CK3/4	CK3/4
3/4 EMT	CK3/4	CK3/4	CK3/4	CK3/4	CK1
3/4 Rigid	CK3/4	CK3/4	CK3/4	CK1	CK1
1 EMT	–	CK1	CK1	CK1	CK1
1 Rigid	–	CK1	CK1	CK1	–

Conduit Size	1/8 in. Flange	3/16 in. - 1/4 in. Flange	5/16 in. - 3/8 in. Flange	7/16 in. - 1/2 in. Flange
Flange				
1/2 EMT	CK1/2	CK1/2	CK3/4	CK3/4
1/2 Rigid	CK1/2	CK3/4	CK3/4	CK1
3/4 EMT	CK3/4	CK3/4	CK1	CK1
3/4 Rigid	CK3/4	CK1	CK1	CK1
1 EMT	CK1	CK1	CK1	CK1
1 Rigid	CK1	CK1	–	–

Features

FROM DROP WIRE

- One-piece construction
- Can be used in vertical or horizontal (0.433-0.535 outer diameter)
- No load rating for positioning only
- No installation tools required





FIG. 1

Cat. No.	Fig. No.	Description	Qty. Per Box
Flexible Conduit Hangers from Drop Wire			
SSF-CK535	1	Flexible conduit hanger from drop wire, #8-#12 wire, 0.433-0.535 O.D. cable	100

Conduit and Cable



Features

- Supports cable from 1/16 in.-1/2 in. flange
- Works with MC and AC cable dimensions 0.178 to 1.250
- Snaps easily onto flange
- Cable snaps right into fastener
- No load rating. For positioning only.
- Installs easily with a hammer




FIG. 1



FIG. 2




FIG. 3

Cat. No.	Fig. No.	Cable O.D. (in.)	Flange Thickness (in.)	Qty. Per Box
Cable Snap Clip				
SSF-CES218	1	0.178 – 0.218	1/16 – 3/16	100
SSF-CES281	1	0.218 – 0.276	1/16 – 3/16	
SSF-CES375	1	0.312 – 0.375	1/16 – 3/16	
SSF-CES437	1	0.375 – 0.437	1/16 – 3/16	
SSF-CES562	1	0.468 – 0.562	1/16 – 3/16	
SSF-CES718	1	0.600 – 0.718	1/16 – 3/16	
SSF-CES937	1	0.750 – 0.937	1/16 – 3/16	
SSF-CES1250	1	0.968 – 1.250	1/16 – 3/16	
SSF-CEM218	1	0.178 – 0.218	3/16 – 9/32	
SSF-CEM281	1	0.218 – 0.276	3/16 – 9/32	
SSF-CEM375	1	0.312 – 0.375	3/16 – 9/32	
SSF-CEM437	1	0.375 – 0.437	3/16 – 9/32	
SSF-CEM562	1	0.468 – 0.562	3/16 – 9/32	
SSF-CEM718	1	0.600 – 0.718	3/16 – 9/32	
SSF-CEM937	1	0.750 – 0.937	3/16 – 9/32	
SSF-CEM1250	1	0.968 – 1.250	3/16 – 9/32	
SSF-CEL218	1	0.178 – 0.218	5/16 – 1/2	
SSF-CEL281	1	0.218 – 0.276	5/16 – 1/2	
SSF-CEL375	1	0.312 – 0.375	5/16 – 1/2	
SSF-CEL437	1	0.375 – 0.437	5/16 – 1/2	
SSF-CEL562	1	0.468 – 0.562	5/16 – 1/2	
SSF-CEL718	1	0.600 – 0.718	5/16 – 1/2	
SSF-CEL937	1	0.750 – 0.937	5/16 – 1/2	
SSF-CEL1250	1	0.968 – 1.250	5/16 – 1/2	
SSF-CF1/8	2	0.200 – 0.468	1/8 – 1/4	
SSF-CF3/8	2	0.276 – 0.600	5/16 – 7/16	
SSF-CAXL1	3	Snap clip adapter	1/2 – 5/8	
SSF-CAXL2	3	Snap clip adapter	5/8 – 3/4	

Features

- Provides quick attachment for MC or AC cable to metal stud
- No load rating. For positioning only.
- No tools required






FIG. 1

Cat. No.	Fig. No.	Description	Qty. Per Box
Flexible Conduit to Metal Stud			
SSF-CM535	1	MC/AC cable to metal stud clip, 14-2 thru 12-3 cable (0.433 in. -0.535 in. O.D.)	100

Conduit and Cable



Features

- Effectively supports 3 runs (CW3) or 6 runs (CW6) of MC/AC cable. Also can be used to support all types of low voltage cabling as a bridle ring would.
- Locking hook contains cables inside the loop



Fig. 1

Cat. No.	Fig. No.	No. of Runs of MC/AC Cable	Inner Diameter (in.)	Ultimate Static Load Limit	Qty. Per Box
Flexible Conduit and Cable Hanger					
SSF-CW3	1	3	1-1/8	20	100
SSF-CW6	1	6	1-3/4	50	

Features

- Back-to-back conduit clips for individual use or use as light weight trapeze
- Available for 3/8 in. through 2 in. sizes for EMT, rigid, flexible conduit and MC/AC cable
- For use as lightweight trapeze. Total load limit is 100 lb.
- Clips for vertical use, static load limit 100 lb.
- No screws or bolts




Fig. 3




Fig. 4




Cat. No.	Fig. No.	Description	Qty. Per Box
Lightweight Trapeze			
SSF-CC1-C3/8	3	Back-to-back conduit clips, 14-2 thru 12-3 MC/AC to 1 in. conduit	25
SSF-CC1-C1/2 3/4	3	Back-to-back conduit clips, 1/2 in. or 3/4 in. conduit to 1 in. conduit	
SSF-CC1-C1	3	Back-to-back conduit clips, 1 in. conduit to 1 in. conduit	
SSF-CC1-C1 1/4	3	Back-to-back conduit clips, 1-1/4 in. conduit to 1 in. conduit	
SSF-CC1-C1 1/2	3	Back-to-back conduit clips, 1-1/2 in. conduit to 1 in. conduit	
SSF-CC1-C2	3	Back-to-back conduit clips, 2 in. conduit to 1 in. conduit	
SSF-CC1/2 3/4-C1/2 3/4*	3	Back-to-back conduit clips, 1/2 in. or 3/4 in. conduit	

Cat. No.	Fig. No.	Description	Static Load Limit	Qty. Per Box
Conduit To Conduit Clips				
SSF-CS1/2-S1/2*	4	Back-to-back snap-in conduit clip, 1/2 in. to 1/2 in. EMT or rigid	25	25
SSF-CS1/2-S3/4*	4	Back-to-back snap-in conduit clip, 1/2 in. to 3/4 in. EMT or rigid		
SSF-CS1/2-S1*	4	Back-to-back snap-in conduit clip, 1/2 in. to 1 in. EMT or rigid		
SSF-CS3/4-S3/4*	4	Back-to-back snap-in conduit clip, 3/4 in. to 3/4 in. EMT or rigid		
SSF-CS3/4-S1*	4	Back-to-back snap-in conduit clip, 3/4 in. to 1 in. EMT or rigid		
SSF-CS1-S1*	4	Back-to-back snap-in conduit clip, 1 in. to 1 in. EMT or rigid		

* UL and cUL not applicable

Conduit and Cable



Features

- Clips available for 1, 2, or 4 cable runs
- The standard CR2 part can be broken apart to create 2 single cable run clips
- Mounting holes available for mounting flat or perpendicular to stud or flange
- Mounting clips for quick attachment to metal studs
- Sturdy design provides firm support of attached cable




Fig. 1



Fig. 2



Fig. 3



Fig. 4




Fig. 5



Fig. 6





Fig. 7



Fig. 8



Features

- Clips available for 1, 2, or 4 cable runs
- The standard CR2 part can be broken apart to create 2 single cable run clips
- Mounting holes available for mounting flat or perpendicular to stud or flange
- Mounting clips for quick attachment to metal studs
- Sturdy design provides firm support of attached cable



Fig. 9



Fig. 10



Fig. 11




Fig. 12



Fig. 13



Fig. 14




Fig. 15

Cat. No.	Fig. No.	Description	Qty. Per Box
MC/AC Cable—Flexible Conduit			
SSF-CR2	1	Metal or wood stud and 1/8 in. flange	100
SSF-CR1	2	Supports 2 runs of MC/AC cable	
SSF-CR4	3	Supports up to 4 runs of MC/AC cable	25
SSF-CR2-BCH	4	5/16 in. thru 1/2 in. flange	
SSF-CR2-BCV	5	5/16 in. thru 1/2 in. flange	
SSF-CR2-F1/2	6	1/8 in. thru 1/4 in. flange	
SSF-CR2-F1/4	6	1/8 in. thru 1/4 in. flange	
SSF-CR2-H1/2	7	1/16 in. thru 1/4 in. C purlin or vertical flange	
SSF-CR2-H1/4	7	1/16 in. thru 1/4 in. C purlin or vertical flange	
SSF-CR2-V1/4	8	1/16 in. thru 1/4 in. C purlin or vertical flange	

Cat. No.	Fig. No.	Description	Qty. Per Box
MC/AC Cable—Flexible Conduit			
SSF-CR2-Z2	9	Z purlin	25
SSF-CR2-UC	10	Through metal stud	
SSF-CR1-CV	11	Acoustical tee	
SSF-CR2-AB	12	Through metal stud	
SSF-CR1-UC	13	Through metal stud	
SSF-CR1-F1/2	14	5/16 in. through 1/2 in. flange	
SSF-CR1-F1/4	14	1/8 in. through 1/4 in. flange	
SSF-CR1-BCH	15	Through 1/2 in. flange	

Conduit and Cable

Conduit Supports




Fig. 1





Fig. 2

Features

- Supports conduit on both sides of a junction box
- Holes in opposite ends of 18 in. bar accommodate CC and CS Series conduit clips
- A center hole accepts BH flange clips and CVC utility clips fasteners for attachment to threaded rod



Cat. No.	Fig. No.	Description	Qty. Per Box
Support Box & Conduits from Single Drop Wires, Rods and Flanges			
SSF-CX18-C3/8H1/4	1	Support bar for conduit/box, MC/AC cable to 3/8 in. flex to 1/8 in. to 1/4 in. flange	25
SSF-CX18-C3/8H1/2	1	Support bar for conduit/box, MC/AC cable to 3/8 in. flex to 9/16 in. to 1/2 in. flange	
SSF-CX18-C1/2 3/4-H1/4	1	Support bar for conduit/box, 1/2 in. & 3/4 in. conduit to 1/8 in. to 1/4 in. flange	
SSF-CX18-C1/2 3/4-H1/2	1	Support bar for conduit/box, 1/2 in. & 3/4 in. conduit to 9/16 in. to 1/2 in. flange	
SSF-CX18-C1-H1/4	1	Support bar for conduit/box, 1 in. conduit to 1/8 in. to 1/4 in. flange	
SSF-CX18-C1-H1/2	1	Support bar for conduit/box 1 in. conduit to 9/16 in. to 1/2 in. flange	
SSF-CX18-C3/8S	2	Support bar for conduit/box, MC/AC cable to 3/8 in. flex, 1/4 in. -20 x 9/16 in. stud in center hole	
SSF-CX18-C1/2 3/4S	2	Support bar for conduit/box, 1/2 in. to 3/4 in. conduit, 1/4 in. -20 x 9/16 in. stud in center hole	
SSF-CX18-C1S	2	Support bar for conduit/box, 1 in. conduit to 3/8 in. flex, 1/4 in. -20 x 9/16 in. stud in center hole	




Fig. 1





Fig. 2

Cat. No.	Fig. No.	Description	Qty. Per Box
Support Box & Conduits from Single Drop Wires, Rods and Flanges			
SSF-CX18-C3/8	1	Support bar for conduit/box, MC/AC cable to 3/8 in. flex for screw or threaded rod mount	25
SSF-CX18-C1/2 3/4	1	Support bar for conduit/box, 1/2 in. to 3/4 in. conduit for screw or threaded rod mount	
SSF-CX18-C1	1	Support bar for conduit/box, 1 in. conduit for screw or threaded rod mount	
SSF-CX18-C3/8UC	2	Support bar for conduit/box, MC/AC cable to 3/8 in. flex from #12 wire thru 3/8 in. rod	
SSF-CX18-C1/2 3/4UC	2	Support bar for conduit/box, 1/2 in. & 3/4 in. conduit from #12 wire thru 3/8 in. rod	
SSF-CX18-C1UC	2	Support bar for conduit/box, 1 in. conduit from #12 wire thru 3/8 in. rod	

Conduit and Cable

Conduit Supports



Features

- Attach conduit to steel, concrete or wood
- FB Series can be used to avoid offset bends when used with 1-1/2 in. deep boxes
- OB Series can be used to avoid offset bends when used with 2-1/8 in. deep boxes




Fig. 1




Fig. 2




Fig. 3





Cat. No.	Fig. No.	Description	Qty. Per Box
Nailing Bracket			
SSF-CC1/2 3/4-FB	1	Nailing bracket riveted to conduit clip, 1/2 in. & 3/4 in. conduit	25
SSF-CS1/2-FB*	2	Nailing bracket riveted to snap-in conduit clip, 1/2 in. EMT & Rigid	
SSF-CS3/4-FB*	2	Nailing bracket riveted to snap-in conduit clip, 3/4 in. EMT & Rigid	
SSF-CS1/2-OB*	3	Offset nailing bracket - 1/2 in. conduit	
SSF-CS3/4-OB*	3	Offset nailing bracket - 3/4 in. conduit	
SSF-CS1-OB*	3	Offset nailing bracket - 1 in. conduit	

* UL and cUL not applicable

Cable Fasteners

Features

- Secures MC/AC cable bundles and Telecom cable bundles
- 11 in. cable tie included

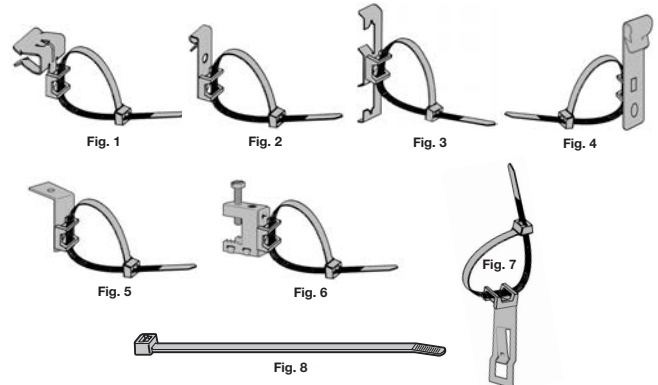

Cat. No.	Fig. No.	Description	Qty. Per Box
Cable Fastener with Cable Tie			
SSF-CT-F1/2	1	5/16 in. to 1/2 in. Flange	25
SSF-CT-F1/4	1	1/8 in. to 1/4 in. Flange	
SSF-CT-V1/4	2	Through 1/4 in. flange	
SSF-CT-UC	3	Utility clip	
SSF-CT-A1/4	4	1/8 in. to 1/4 in. Vertical flange	
SSF-CT-AB	5	Angle bracket	
SSF-CT-BC	6	Through 1/2 in. flange	
SSF-CT-CH	7	Acoustical tee	100
L11-120-9-C	8	11 in. Cable Tie	