

Insulating Bushings

Press fit. Holds firmly in place when pulling cables. For use with EMT, Rigid, IMC, PVC.

Arlington's Insulating Bushings protect cables from abrasion by the conduit. Conduit is often used to protect cables where damage could occur in a house or building.

Examples: Power, Cable TV, computer data lines, telephone/modem, audio/video cables, alarm systems, and security systems.

FOR USE WITH EMT

| CATALOG NUMBER | UPC/DCI/NAED MFG #018997 | TRADE SIZE | UNIT PKG | STD PKG | DIM A | DIM B |
|----------------------------|--------------------------|------------|----------|---------|-------|-------|
| EMT50 | 12200 | 1/2 | 100 | 1000 | .520 | .840 |
| EMT75 | 12205 | 3/4 | 100 | 1000 | .531 | 1.056 |
| EMT100 | 12220 | 1 | 100 | 100 | .625 | 1.278 |
| EMT125 | 12225 | 1-1/4 | 100 | 100 | .614 | 1.640 |
| EMT150 | 12230 | 1-1/2 | 100 | 100 | .630 | 1.915 |
| EMT200 | 12235 | 2 | 50 | 50 | .627 | 2.327 |
| EMT250* | 12240 | 2-1/2 | 25 | 25 | 1.230 | 3.065 |
| EMT300* | 12245 | 3 | 25 | 25 | 1.230 | 3.695 |
| EMT350* | 12250 | 3-1/2 | 25 | 25 | 1.230 | 4.311 |
| EMT400* | 12255 | 4 | 25 | 25 | 1.240 | 4.812 |
| SPLIT INSULATING BUSHINGS† | | | | | | |
| EMT200S | 15301 | 2 | 50 | 50 | .875 | 2.327 |
| EMT250S* | 12270 | 2-1/2 | 25 | 25 | 1.240 | 3.065 |
| EMT300S* | 12271 | 3 | 25 | 25 | 1.240 | 3.695 |
| EMT350S* | 12272 | 3-1/2 | 25 | 25 | 1.240 | 4.311 |
| EMT400S* | 22001 | 4 | 25 | 25 | 1.240 | 4.812 |



Note: Meets 2017 NEC code requirements for 300.15(c) protection. Listed for use in environmental air handling spaces per 2017 NEC code requirements 300.22(c).

*Can also be used with Rigid, IMC, PVC
†PATENTED.

FOR USE WITH RIGID, IMC, PVC

| CATALOG NUMBER | UPC/DCI/NAED MFG #018997 | TRADE SIZE | UNIT PKG | STD PKG | DIM A | DIM B |
|----------------|--------------------------|------------|----------|---------|-------|-------|
| RGD50 | 51930 | 1/2 | 100 | 1000 | .523 | 1.072 |
| RGD75 | 51932 | 3/4 | 100 | 1000 | .534 | 1.282 |
| RGD100 | 51933 | 1 | 100 | 100 | .620 | 1.541 |
| RGD125 | 51934 | 1-1/4 | 100 | 100 | .622 | 1.900 |
| RGD150 | 51935 | 1-1/2 | 100 | 100 | .618 | 2.152 |
| RGD200 | 51936 | 2 | 50 | 50 | .629 | 2.646 |




EMT50





RGD50



EMT400S



EMT200S - EMT400S

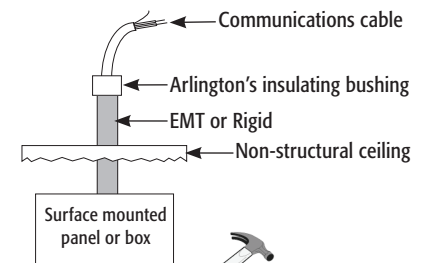

Place board over bushing and tap onto EMT or Rigid with hammer.



The EMT400S insulating bushing is split for easy installation when cables are already in place. They press fit onto conduit and secure with a cable tie. When used for cable protection only, these insulating bushings are a perfect substitution for costly fittings.